DR-500 *HP*

High power RF coupler for HF

HF 1.8–30 MHz
7000 W continuous
10000 W peak



1.8–30
MHz frequency range

7000 W
continuous power

10000 W
peak power

SMA
forward and reflected outputs

Very high power

Handles 7000 W continuous and 10000 W peak power in the antenna line.

HF bands

Covers the HF range from 1.8 to 30 MHz.

Teflon RF connectors

TEFLON RF input and antenna connectors for the main RF path.

SMA sample outputs

SMA outputs for forward and reflected power, to feed your meter.

Stainless steel housing

A solid stainless steel housing.


For your DR meter

Sends small samples of forward and reflected power to the meter.

sv1ozcq@gmail.com · WhatsApp +30 6932590383

Connection and specifications on the next page

How it *connects*

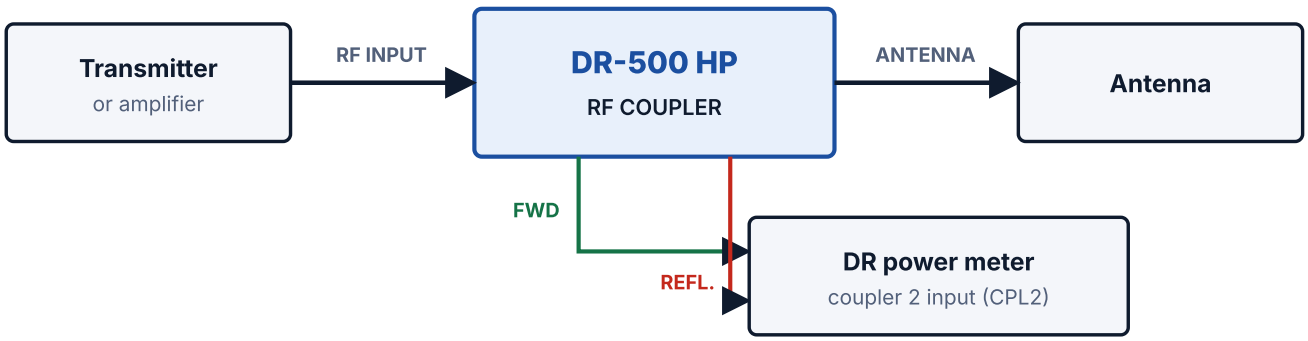

1

Put it in the antenna line

Connect the transmitter or amplifier to `RF INPUT` and the antenna to `ANTENNA`.

2

Connect your meter

Connect the SMA outputs `FWD` and `REFL.` to the coupler 2 inputs of your DR power meter.

3

Select and calibrate

Select `CPL2` on the meter, then calibrate with the **Calibration steps** guide on www.hamradioscafe.com.

Technical *specifications*

RF AND POWER

Frequency range	**1.8–30 MHz (HF)**
Power handling	**7000 W continuous, 10000 W peak**
RF connectors	**TEFLON RF input and antenna connectors**
Use with	**The coupler 2 (external coupler) input of the DR power meters**

OUTPUTS AND BUILD

Sample outputs	**SMA connectors for forward (FWD) and reflected (REFL.) power**
Housing	**Stainless steel**
Front plate	**Marked RF INPUT, ANTENNA, FWD and REFL.**

Choose your *coupler*

	DR-500	DR-500 HP
Frequency range	1.8–54 MHz (HF and 6M)	**1.8–30 MHz (HF)**
Continuous power	2500 W	**7000 W**
Peak power	5000 W	**10000 W**
Outputs	SMA, forward and reflected	**SMA, forward and reflected**

ORDER AND QUESTIONS

Email sv1ozcq@gmail.com
WhatsApp +30 6932590383
Website www.hamradioscafe.com

COMMUNITY

Facebook group Ham Radio Café
YouTube Ham Radio Café
Photos and customer reviews

Scan to join our Facebook group